

Proair 960 H/C Technical data sheet

The ProAir 960 is considered as the performance standard in the Transit Bus Dash System arena. It's exceptional performance and versatile design lends itself to almost every application. With minor OEM required adjustment the standard design can be adapted to most any platform.

COMPONENT SPECIFICATIONS

Heating and Cooling Performance

31,000 Btu/hr IMACA Cooling Capacity 56,000 Btu/hr IMACA Heating Capacity

Air Flow

600 CFM @ 0 static Pressure

Power Requirement

12 Volts DC

Draw is 16.3 Amps @ 13.5 Volts

Weinht

37 Lbs.

Dimensions

Height: 17.75" Width: 21.5" Depth: 8.25"

Construction

Non Corrosive sturdy Gavaneel coated metal case Steel drain pan with integral drain nipples Fresh, Re-Circulation and Vent doors

Warrantv

ProAir systems are covered by an industry-leading two-year warranty. Complete terms are outlined in our Warranty Statement, Consult ProAir for detailed information.

> PROAIR 580 Cool Only/585 Heat/Cool

• Size: 41"L x 6,75"H x 17.375"W


Size of Cover: 41.5"L x 7"H x 22"W


BTU Cool: 61,000

BTU Heat: 80,000

Weight: 40lbs

Draw: 40amps

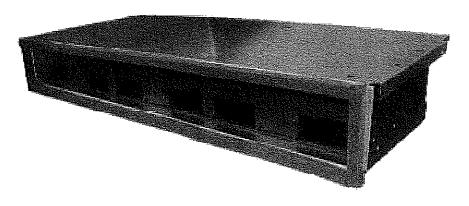

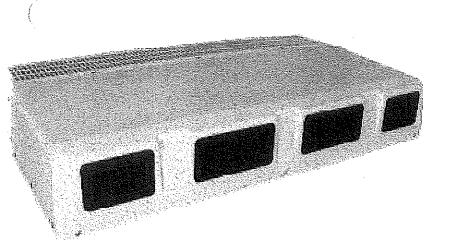

Frigiking 580/585 units are made to pack a punch! They come in free blow, or with a cover, cool only, or heat/cool. If you're looking for a unit with some power contact your ProAir Sales Representative.

ProAir 2900 County Road 6 W Elkhart, IN 46514 Phone: (574)264-5494 Fax:(574)264-0876